




# STYLE 810

## PTFE FLANGE SEAL AND GASKET MATERIAL

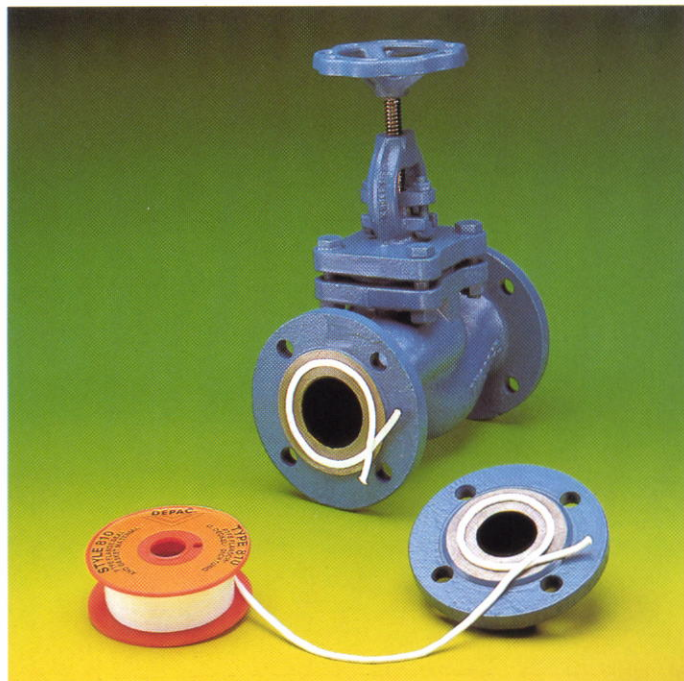

### RANGE OF APPLICATIONS

Steam, water, condensate, chemicals, gases, oils, solvents etc. (exception: molten alkali-metals)

### EQUIPMENT

Flanges, lids, gear units, mixers, agitators, reactor vessels, covers, pumps, etc.

### INDUSTRIES

Can be used by all industries including marine

### THE NON-ASBESTOS ALTERNATIVE

#### THE UNIVERSALLY APPLICABLE SELF-ADHESIVE SEAL FOR FLANGES, COVERS AND LIDS

- Temp. . . . . . – 330° F to + 530° F  
(– 200° C to + 260° C)
- pH-Range . . . . . 0–14
- Pressure . . . . . 3000 PSI (200 bar)
- Staining . . . . . no

### NON-ASBESTOS

The industry is increasingly determined to replace asbestos packings by different alternative products.

**DEPAC STYLE 810** is such modern non-asbestos replacement which is applicable to a wide variety of equipment.

### CHEMICAL RESISTANCE

**DEPAC STYLE 810** is made of 100% PTFE. It is very special and new that this PTFE material cannot be extruded in spite of its softness and pliancy. Unlike conventional flat gasket materials **TYPE 810** fills all voids and adjusts readily and completely to uneven flange surfaces.

### GASKETING MADE TO MEASURE

The self-adhesive surface decreases maintenance work to an absolute minimum. Splippage during installation work, especially during „on the spot jobs“, will be eliminated. The self-adhesive surface attached to the packing only needs to be pulled off whereas the packing is squeezed onto the flange or surface. Carefully overlap the ends and tighten the flange bolts or lid parts – finished. There is no simpler method!

### UNIVERSAL USAGE

**DEPAC STYLE 810** is non-reactive throughout the entire pH-range of 0–14 with the only exception of molten alkali-metals. Because of this and its outstanding compression strength **DEPAC STYLE 810** is not only a fast and highly effective sealant for flanges and lids but also for all kinds of different equipment for the entire industry.



# STYLE 810

## PTFE FLANGE SEAL AND GASKET MATERIAL

**DEPAC** STYLE 810 was developed to provide an instant packing simplifying considerably the maintenance work on flanges, covers, lids etc.

**DEPAC** STYLE 810 is an efficient, easy to use, easy to carry and easy to apply sealant for a wide variety of applications. The material is soft and pliable, it never hardens, never adheres and is completely inert. It is clean and economical.

**DEPAC** STYLE 810 is an instant gasket eliminating the costly cutting of gaskets from gasket sheets in order to fit the many different flange configurations to be sealed. There will be no more need for large inventories of different gaskets as any gasket size can be formed using this packing following simple installation instructions.

### POSSIBILITY FOR STANDARDIZATION

| APPROXIMATE DATA |                  |             |          |           |
|------------------|------------------|-------------|----------|-----------|
| Reorder No.      | With x Thickness |             | Length   |           |
|                  | mm               | inch        | m        | ft        |
| 81003            | 3 x 1.5          | 1/8 x 1/16  | 10 25    | 35 80     |
| 81005            | 5 x 2            | 3/16 x 3/32 | 10 25    | 35 80     |
| 81007            | 7 x 2.5          | 1/4 x 3/32  | 10 25    | 35 80     |
| 81010            | 10 x 3           | 3/8 x 1/8   | 10 25 50 | 35 80 160 |
| 81014            | 14 x 5           | 9/16 x 3/16 | 10 25 50 | 35 80 160 |
| 81017            | 17 x 6           | 11/16 x 1/4 | 5 10 25  | 16 35 80  |
| 81020            | 20 x 7           | 13/16 x 1/4 | 5 10 25  | 16 35 80  |

Other sizes and length on request.

Recommended width

|                |     |      |                   |
|----------------|-----|------|-------------------|
| Up to pipesize | 2"  | with | 1/8"              |
|                | 8"  |      | 3/16"             |
|                | 25" |      | 1/4"              |
|                | 60" |      | 3/8"              |
| above          | 60" |      | 9/16 11/16 13/16" |

**DEPAC AG**  
Neugrüt 994  
FL-9496 Balzers/Liechtenstein  
Telephone 075-42844  
Telefax 075-42836

**DEPAC GMBH**  
Ackerstraße 36  
D-4900 Herford/Germany  
Telephone 05221/57766  
Telex 934926  
Telefax 05221/57788

**DEPAC SEALING LTD.**  
Grant Thornton  
Bold Street Chambers  
31 Bold Street  
GB-Warrington WA1 1HL/England  
Telephone 0925-31333  
Telefax 0925-413899

**DEPAC INC.**  
The Company Corporation 9018442  
725 Market Street  
USA-Wilmington/Delaware 19801  
Telephone 302-575 0440  
Telefax 302-575 1346

**KUNGÄLV SEAL-PACK AB  
(DEPAC SWEDEN)**  
Backa Bergögata 10  
S-42246 Hisings Backa/Sweden  
Telephone 031-581220  
Telefax 031-526115

**DEPAC GES.M.B.H.**  
Bahnhofstraße 26  
A-6710 Nenzing/Austria  
Telephone 05525-3401  
Telefax 05525-3358

Erhältlich durch:  
Available through: