


Designtrykk: 2,5 [barg]

PN 2,5

DN	TYPE	Bevegelse		Ln	Stivhet		Sveiseender			Di	Do	Belg-areal	Vekt
		+/-AX	+/-LA		AX	LA	D	L2	S				
		[mm]	[mm]	[mm]	[N/mm]	[N/mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm ²]	[kg]
40	0040-015-0	15	9	175	69	27	48,3	40	2,6	40,5	57,7	1893	0,4
40	0040-021-0	21	20	215	48	10	48,3	40	2,6	40,5	57,7	1893	0,4
50	0050-016-0	16	8	175	77	46	60,3	40	2,9	52,5	69,7	2932	0,5
50	0050-023-0	23	17	215	53	17	60,3	40	2,9	52,5	69,7	2932	0,6
65	0065-016-0	16	5	155	81	127	76,1	40	3,2	68,3	87,5	4766	0,7
65	0065-029-0	29	16	215	43	22	76,1	40	3,2	68,3	87,5	4766	0,8
80	0080-019-0	19	6	170	76	76	88,9	40	3,2	79,1	100,3	6319	0,9
80	0080-030-0	30	15	220	48	31	88,9	40	3,2	79,1	100,3	6319	1,1
100	0100-018-0	18	3	145	73	330	114,3	40	3,6	104,6	129,8	10788	1,2
100	0100-033-0	33	10	190	41	67	114,3	40	3,6	104,6	129,8	10788	1,4
125	0125-016-0	16	2,5	150	148	966	139,7	40	3,6	130,2	157,8	16286	1,8
125	0125-035-0	35	11	220	67	112	139,7	40	3,6	130,2	157,8	16286	2,3
150	0150-023-0	23	4	195	127	624	168,3	50	4,0	155,0	186,6	22979	2,8
150	0150-040-0	40	12	255	70	126	168,3	50	4,0	155,0	186,6	22979	3,3
175	0175-022-0	22	3,5	195	139	907	193,7	50	4,5	180,6	212,2	30295	3,7
175	0175-040-0	40	10	255	78	183	193,7	50	4,5	180,6	212,2	30295	4,3
200	0200-025-0	25	3,5	195	128	1054	219,1	50	4,5	206,1	239,7	39022	4,3
200	0200-044-0	44	10	255	71	219	219,1	50	4,5	206,1	239,7	39022	5,0
250	0250-024-0	24	2,7	195	155	1970	273,3	50	5,0	260,0	293,6	60175	5,8
250	0250-042-0	42	8	255	86	410	273,0	50	5,0	260,0	293,6	60175	6,7
300	0300-025-0	25	2,5	235	155	2793	323,9	70	6,0	310,9	346,5	84857	9,8
300	0300-045-0	45	7	290	86	607	323,9	70	6,0	310,9	346,5	84857	10,9
350	0350-025-0	25	2	235	169	3659	355,6	70	6,0	342,6	378,2	102014	11,9

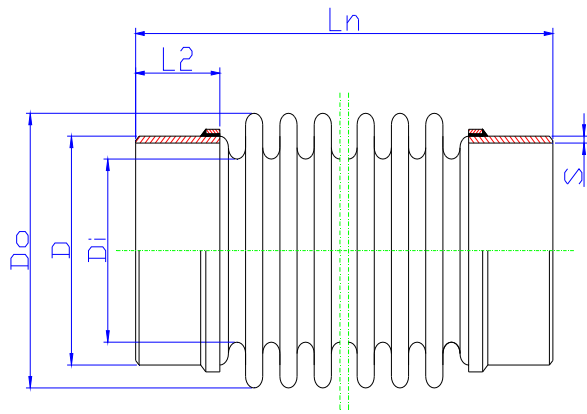

Designtrykk:

2,5 [barg]

DN	TYPE	Movements		Ln	Springrates		Weldingends			Di	Do	Bellow-area	Weight
		+/-AX	+/-LA		AX	LA	D	L2	S				
		[mm]	[mm]	[mm]	[N/mm]	[N/mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm ²]	[kg]
600	0600-036-0	36	2,5	270	225	7770	609,6	70	6,0	584,6	652,6	295706	24,3
600	0600-068-0	68	7	330	76	1204	609,6	70	6,0	584,6	642,6	295706	24,9
700	0700-041-0	41	2	270	174	8191	711,0	70	8,0	686,0	752,0	406020	28,8
700	0700-063-0	63	5	330	105	2332	711,0	70	8,0	686,0	752,0	406020	31,8
800	0800-041-0	41	2	270	196	11996	813,0	70	8,0	788,0	854,0	529391	36,4
800	0800-066-0	66	5	330	118	3314	813,0	70	8,0	788,0	854,0	529391	39,9
900	0900-041-0	41	1,5	270	217	16765	914,0	70	8,0	889,0	955,0	667654	41,1
900	0900-066-0	66	4	330	130	4631	914,0	70	8,0	889,0	955,0	667654	44,8
1000	1000-041-0	41	1,5	270	239	22707	1016,0	70	8,0	991,0	1057,0	823550	45,7
1000	1000-066-0	66	4	330	144	6273	1016,0	70	8,0	991,0	1057,0	823550	49,8
1100	1100-041-0	41	1,5	270	260	30052	1120,0	70	8,0	1095,0	1164,0	999328	60,0
1100	1100-066-0	66	3	330	156	8301	1120,0	70	8,0	1095,0	1161,0	999328	64,6
1200	1200-040-0	40	1	270	281	38451	1220,0	70	8,0	1195,0	1261,0	1184368	65,5
1200	1200-066-0	66	3	330	169	10622	1220,0	70	8,0	1195,0	1261,0	1184368	70,4
1300	1300-040-0	40	1	270	302	48343	1320,0	70	8,0	1295,0	1361,0	1385115	78,6
1300	1300-066-0	66	3	330	181	13355	1320,0	70	8,0	1295,0	1361,0	1385115	83,9
1400	1400-040-0	40	1	270	323	59838	1420,0	70	8,0	1395,0	1461,0	1601571	84,6
1400	1400-066-0	66	2	330	194	16530	1420,0	70	8,0	1395,0	1461,0	1601571	90,3
1500	1500-041-0	41	1	270	513	102164	1520,0	70	8,0	1495,0	1561,0	1833735	107,8
1500	1500-066-0	66	2	330	207	20169	1520,0	70	8,0	1495,0	1561,0	1833735	106,2
1600	1600-041-0	41	1	270	545	123098	1620,0	70	8,0	1595,0	1661,0	2081606	114,9
1600	1600-065-0	65	2	330	220	23596	1620,0	70	8,0	1595,0	1661,0	2081606	113,2
1700	1700-041-0	41	1	270	456	117693	1720,0	70	8,0	1695,5	1768,5	2356056	132,2